

PLA-ZRP35/50/60/71/100/125/140BA
PLA-RP35/50/60/71/100/125/140BA

PLA SERIES

A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.



Deluxe 4-way Cassette Line-up

For users seeking even further energy-savings, Mitsubishi Electric offers complete deluxe units (PLA-ZRP) for the complete line-up of models in this series from 35–140. Compared to the standard models (PLA-RP), deluxe models provide additional energy-savings, contributing to a significant reduction in electricity costs.

Line-up

Series	Model	35	50	60	71	100	125	140
Deluxe 4-way Cassette (PLA-ZRP)		●	●	●	●	●	●	●
		PLA-ZRP35BA	PLA-ZRP50BA	PLA-ZRP60BA	PLA-ZRP71BA	PLA-ZRP100BA	PLA-ZRP125BA	PLA-ZRP140BA
Standard 4-way Cassette (PLA-RP)		●	●	●	●	●	●	●
		PLA-RP35BA	PLA-RP50BA	PLA-RP60BA	PLA-RP71BA	PLA-RP100BA	PLA-RP125BA	PLA-RP140BA

Key Technologies for Higher Energy Efficiency


New Heat Exchanger Design

Heat exchanger fin size and pitch have been changed, raising energy efficiency.

Pre-grooved Piping


High-performance pre-grooved piping is utilised, increasing the heat exchange area.

Indoor/Outdoor Unit Combinations

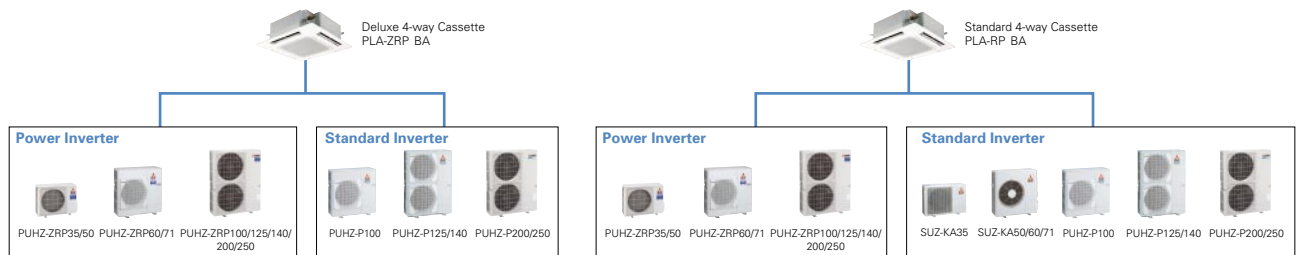

"Rank A++/A+" Energy Savings Achieved for Deluxe 4-way Cassette



Our new deluxe 4-way cassette indoor units combined with newly designed Power Inverter outdoor units (PUHZ-ZRP) achieve industry-leading seasonal efficiency for both cooling and heating: all rank A++ for cooling and A+ or higher for heating.

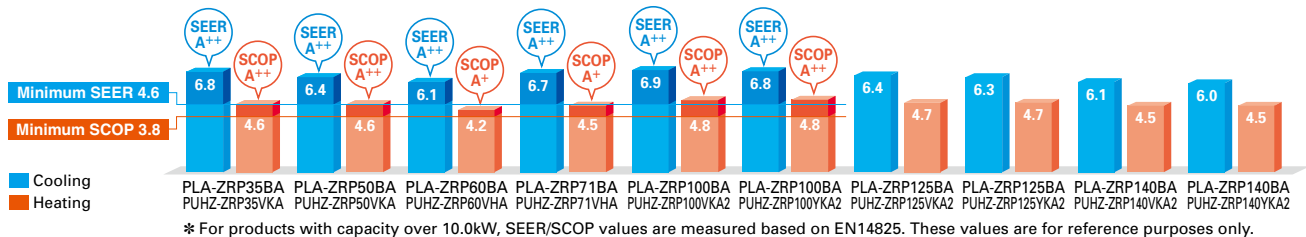

Automatic Grille Lowering Function (PLP-6BAJ)

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the grille for maintenance.

The grille can be lowered a maximum of 4m from the ceiling in 8 steps, thus enabling easy cleaning of the air filter. Cleaning of the filter is an important factor for saving energy.

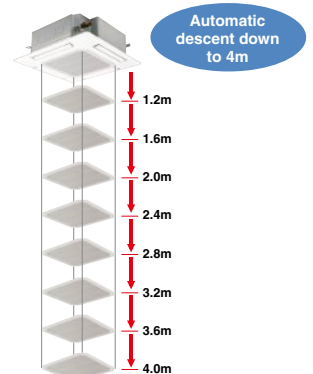


Optimum Airflow

Individual Vane Settings

Optimum airflow settings provide maximum comfort throughout the room.

In addition to the selection of variable airflow patterns (i.e., 2-, 3- or 4-way), this function allows the independent selection of vertical airflow levels for each vane, thereby maintaining a comfortable room environment with even temperature distribution.

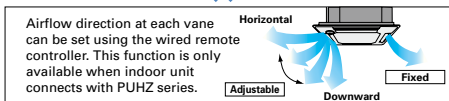

72 airflow patterns

Wide Airflow

Wide-angle outlets distribute airflow to all corners of the room.

The outlets are larger than those of previous models and the shape has been improved for better wide-angle ventilation.


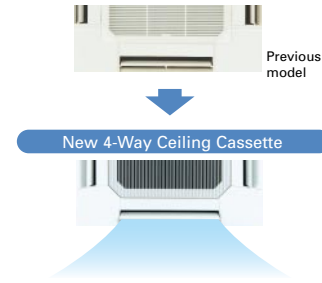


Image of multi-directional air conditioning

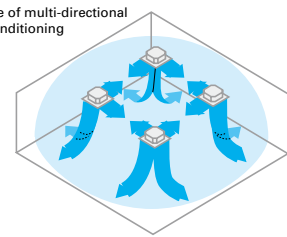


Individual Vane Setting + Wide Airflow

The combination of individual vane setting, which enables the optimal outlet setting for each room layout, and the wide airflow function works to ensure even temperature distribution throughout each room. The result is uniformly comfortable air conditioning.

Wave Airflow – Thoroughly warming all corners of the room!


Wave Airflow Operation

“Wave Airflow” is essentially the advanced control of the vanes directing the airflow from the unit. Blown-air is repeatedly dispersed from the unit in horizontal and downward directions at time-lagged intervals to provide uniform heating throughout the room.

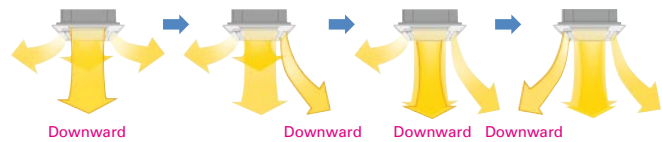

* Wave Airflow is possible only when using the heating mode


Thermograph of Wave Control Effect

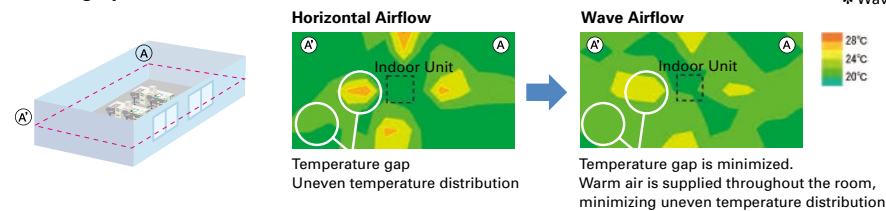

Temperature distribution comparison approximately 20min after turning on a PLA-RP71BA 4-Way ceiling cassette. The measurement point for comparison is a plane 1.2m above the floor.

Equipped with High- and Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

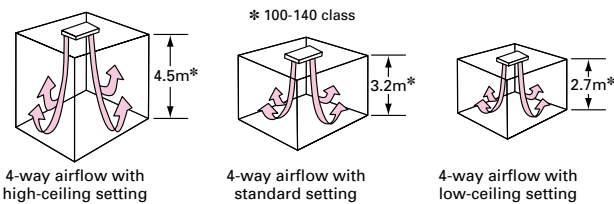


Airflow Range

Model	35-71 class			100-140 class		
	High-ceiling setting	Standard setting	Low-ceiling setting	High-ceiling setting	Standard setting	Low-ceiling setting
4-Way	3.5m	2.4m	2.5m	4.5m	3.2m	2.7m
3-Way	3.5m	3.0m	2.7m	4.5m	3.6m	3.0m
2-Way	3.5m	3.3m	3.0m	4.5m	4.0m	3.3m

Horizontal Airflow


A “Horizontal Airflow” function has been added to reduce drafty-feeling distribution. Horizontal Airflow prevents cold drafts from striking the body directly, thereby keeping the body from becoming over-chilled.



[Airflow Distribution]

PLA-RP125BA

Flow angle, cooling at 20°C (ceiling height 3.2m)

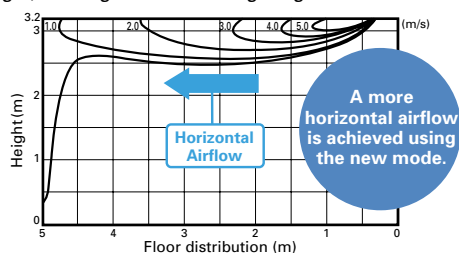


* Smudge spots on the ceiling may form where the airflow is not evenly distributed.

Automatic Air-speed Adjustment

An automatic air-speed mode that adjusts airflow speed automatically is adopted to maintain comfortable room conditions at all times. This setting automatically adjusts the air-speed to conditions that match the room environment.

At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room.

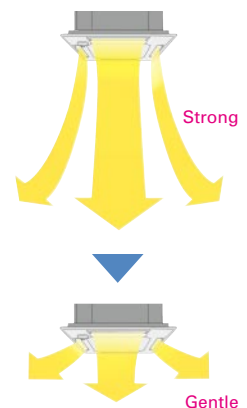


When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

DOES HAVING COLD FEET BOTHER YOU?

The "i-see Sensor" is the answer to your problems!




i-see Sensor

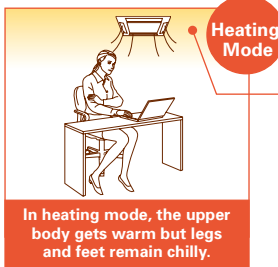

Warm air rises to the ceiling!

Even though the temperature on the remote controller is at a preset temperature, the temperature at floor level remains cold. As a result, there's no feeling of getting warmer.

In heating mode, the upper body gets warm but legs and feet remain chilly.

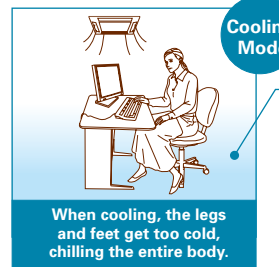

Legs and feet feel cold!

At the beginning of operation, the room is nice and cool; but before long the temperature at floor level drops, causing the feeling of being too cold.

When cooling, the legs and feet get too cold, chilling the entire body.

"i-see Sensor" temperature-sensing technology improves energy efficiency and enhances room comfort

The "i-see Sensor" is an innovative Mitsubishi Electric technology that uses a radiation-based sensor to monitor temperature throughout an entire room. When connected to the air conditioner control panel, i-see Sensor works to maximize room comfort.

i-see Sensor Panel




or

Corner Panel Only (Option)



i-see Sensor Operation



The i-see Sensor rotates 90° at intervals of 5 sec, accurately measuring the temperature throughout the room (covering entire floor space).

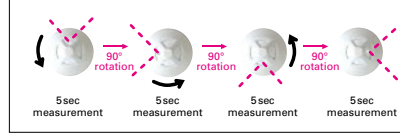

A comfortable room environment cannot be maintained by monitoring only the temperature at the ceiling.

Without "i-see Sensor"

Only intake-air temperature at the ceiling was measured, tending to overlook uneven temperature distribution at floor level.

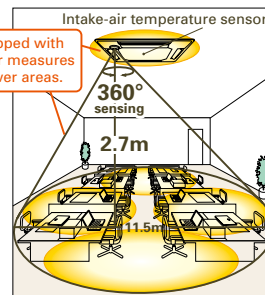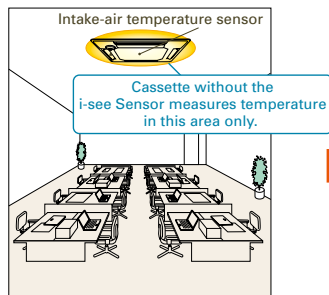


Equipped with 4-Way Ceiling "i-see Sensor"

Both the floor temperature and intake-air temperature are measured to provide operation that creates a comfortable room environment from ceiling to floor.

In Heating Mode

When you want the temperature felt to be 20°

Temperature setting: 20°C (w/o i-see Sensor)

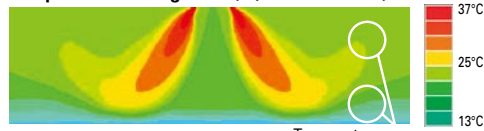


Temperature felt: 17°C (floor level 14°C)

Warm air rises to the ceiling. This causes poor heating at floor level, leaving legs and feet feeling cold.

Temperature setting: 20°C

(w/ i-see Sensor + Automatic Air-speed Adjustment)

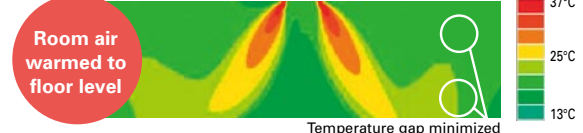



Temperature felt: 20°C (floor level 20°C)

The i-see Sensor detects the temperature at the floor while the Automatic Air-speed Adjustment eliminates uneven temperature distribution by thoroughly warming the air down to the floor.

In Cooling Mode

When you want the temperature felt to be 28°C

Temperature setting: 26-27°C (w/o i-see Sensor)

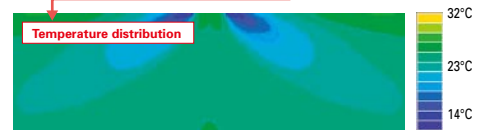
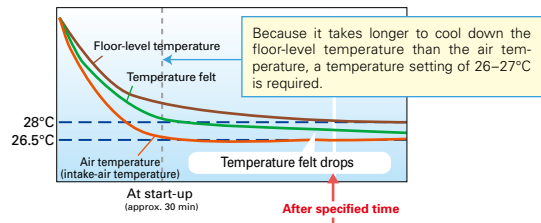


Temperature felt: 26.5°C

The temperature felt drops according to the drop in floor-level temperature. If the floor-level temperature is not monitored during long cooling operation, the temperature felt becomes chilly.

Temperature setting: 28°C

(w/ i-see Sensor + Automatic Air-speed Adjustment)

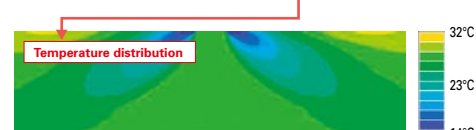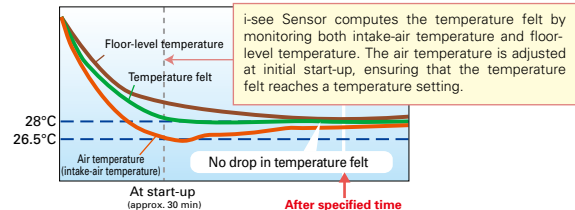

Temperature Felt: 28°C

Air temperature is adjusted according to the floor temperature to keep the temperature felt at 28°C.

Comfortable without excess chilliness

SERIES SELECTION

Power Inverter Series



Indoor Unit



PLA-ZRP35/50/60/71/100/125/140BA

Standard Panel

PLP-6BA (only Panel)
PLP-6BALM (with wireless remote controller)

Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)
PLP-6BALME (with wireless remote controller)

Outdoor Unit

For Single



PUHZ-ZRP35/50

PUHZ-ZRP60/71

PUHZ-ZRP100/125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-ZRP71

PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



*

* Enclosed in PLP-6BALM/PLP-6BALME

Standard Inverter Series



Indoor Unit



PLA-RP35/50/60/71/100/125/140BA

Standard Panel

PLP-6BA (only Panel)
PLP-6BALM (with wireless remote controller)

Automatic Filter Elevation Panel

PLP-6BAJ (only Panel)

Standard Panel with "i-see Sensor"

PLP-6BAE (only Panel)
PLP-6BALME (with wireless remote controller)

Outdoor Unit

For Single



SUZ-KA35

SUZ-KA50/60/71

PUHZ-P100

PUHZ-P125/140

For Multi (Twin/Triple/Quadruple)



PUHZ-P100

PUHZ-P125/140

PUHZ-P200/250

Remote Controller



Optional



Optional



*

* Enclosed in PLP-6BALM/PLP-6BALME

PLZ-ZRP/RP BA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																				
	For Single										For Twin					For Triple			For Quadruple		
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250	
Power Inverter (PUHZ-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4	
Distribution Pipe	-	-	-	-	-	-	-	-	-	MSDD-50TR-E				MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E		
Standard Inverter (PUHZ-P & SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	-	-	-	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4	
Distribution Pipe	-	-	-	-	-	-	-	-	-	-	MSDD-50TR-E				MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E	

PLZ-RP SERIES

POWER INVERTER




Type		Inverter Heat Pump												
Indoor Unit		PLA-ZRP35BA	PLA-ZRP50BA	PLA-ZRP60BA	PLA-ZRP71BA	PLA-RP100BA		PLA-ZRP125BA		PLA-ZRP140BA				
Outdoor Unit		PUHZ-ZRP35VKA	PUHZ-ZRP50VKA	PUHZ-ZRP60VHA	PUHZ-ZRP71VHA	PUHZ-ZRP100VKA2	PUHZ-ZRP100YKA2	PUHZ-ZRP125VKA2	PUHZ-ZRP125YKA2	PUHZ-ZRP140VKA2	PUHZ-ZRP140YKA2			
Refrigerant		R410A ^{*1}												
Power Supply		Outdoor power supply VKA · VKA2 · VHA:230 / Single / 50, YKA2:400 / Three / 50												
Cooling	Capacity	Rated	kW		3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max	kW		1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW		0.79	1.43	1.78	1.77	2.16	2.16	3.87	3.87	4.37	4.37
	EER				-	-	-	-	-	-	3.23	3.23	3.07	3.07
		EEL Rank			-	-	-	-	-	-	-	-	-	-
	Design Load		kW		3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
	Annual Electricity Consumption ^{*2}		kWh/a		185	272	350	370	484	493	685	695	770	781
	SEER				6.8	6.4	6.1	6.7	6.9	6.8	6.4	6.3	6.1 ^{**}	6.0 ^{**}
		Energy Efficiency Class			A++	A++	A++	A++	A++	A++	A++	A++	A++	A++
		Capacity	Rated	kW		4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0
Heating (Average Season)	Total Input	Rated	kW		1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	COP				-	-	-	-	-	-	3.81	3.81	3.40	3.40
		EEL Rank			-	-	-	-	-	-	-	-	-	-
	Design Load		kW		2.4	3.8	4.4	4.7	7.8	7.8	9.3	9.3	10.6	10.6
	Declared Capacity	at reference design temperature	kW		2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	9.3 (-10°C)	9.3 (-10°C)	10.6 (-10°C)	10.6 (-10°C)
		at bivalent temperature	kW		2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	9.3 (-10°C)	9.3 (-10°C)	10.6 (-10°C)	10.6 (-10°C)
		at operation limit temperature	kW		2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	7.0 (-20°C)	7.0 (-20°C)	7.9 (-20°C)	7.9 (-20°C)
	Back Up Heating Capacity		kW		0	0	0	0	0	0	0	0	0	0
	Annual Electricity Consumption ^{*2}		kWh/a		729	1162	1462	1476	2275	2275	2778	2778	3324	3324
	SCOP				4.6	4.6	4.2	4.5	4.8	4.8	4.7 ^{**}	4.7 ^{**}	4.5 ^{**}	4.5 ^{**}
	Energy Efficiency Class			A++	A++	A+	A+	A++	A++	A++	A++	A++	A++	
Operating Current (max)			A		13.3	13.3	19.3	19.5	27.2	8.7	27.3	10.3	29.1	14.1
Indoor Unit	Input	Rated	kW		0.04	0.04	0.04	0.05	0.08	0.08	0.09	0.09	0.12	0.12
	Operating Current (max)		A		0.28	0.30	0.30	0.45	0.74	0.74	0.80	0.80	1.07	1.07
	Dimensions <Panel>	H x W x D	mm		258 - 840 - 840	<35 - 950 - 950>			25 <6>	26 <6>	298 - 840 - 840	<35 - 950 - 950>	27 <6>	27 <6>
	Weight <Panel>		kg		23 <6>	23 <6>	23 <6>	23 <6>	25 <6>	26 <6>	26 <6>	27 <6>	27 <6>	27 <6>
	Air Volume [Lo-Mi2-Mi1-Hi]		m ³ /min		11 - 13 - 15 - 16	12 - 14 - 16 - 18	12 - 14 - 16 - 18	17 - 19 - 21 - 23	20 - 23 - 26 - 30	20 - 23 - 26 - 30	22 - 25 - 28 - 31	22 - 25 - 28 - 31	24 - 26 - 29 - 32	24 - 26 - 29 - 32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)		27 - 28 - 29 - 31	28 - 29 - 31 - 32	28 - 29 - 31 - 32	28 - 30 - 34 - 36	32 - 34 - 37 - 40	32 - 34 - 37 - 40	34 - 36 - 39 - 41	34 - 36 - 39 - 41	36 - 39 - 42 - 44	36 - 39 - 42 - 44
	Sound Level (PWL)		dB(A)		54	55	55	58	65	65	66	66	70	70
	Dimensions	H x W x D	mm		630 - 809 - 300	943 - 950 - 330 (+30)			116	123	1338 - 1050 - 330 (+40)		118	131
	Weight		kg		43	46	67	67	116	123	116	125	118	131
	Air Volume	Cooling	m ³ /min		45.0	45.0	55.0	55.0	110.0	110.0	120.0	120.0	120.0	120.0
	Heating	m ³ /min		45.0	45.0	55.0	55.0	110.0	110.0	120.0	120.0	120.0	120.0	
Sound Level (SPL)	Cooling	dB(A)		44	44	47	47	49	49	50	50	50	50	
	Heating	dB(A)		46	46	48	48	51	51	52	52	52	52	
Sound Level (PWL)	Cooling	dB(A)		65	65	67	67	69	69	70	70	70	70	
	Heating	dB(A)		65	65	67	67	69	69	70	70	70	70	
Operating Current (max)		A		13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0	
Breaker Size		A		16	16	25	25	32	16	32	16	40	16	
Ext. Piping	Diameter	Liquid / Gas	mm		6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m		50	50	50	50	75	75	75	75	75	
	Max. Height	Out-In	m		30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling ^{*3}		°C		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating		°C		-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
^{*2} Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
^{*3} Optional air protection guide is required where ambient temperature is lower than -5°C. ^{*4} SEER/SCOP values are measured based on EN14825. These values are reference purpose only.

PLZ-P SERIES

STANDARD INVERTER

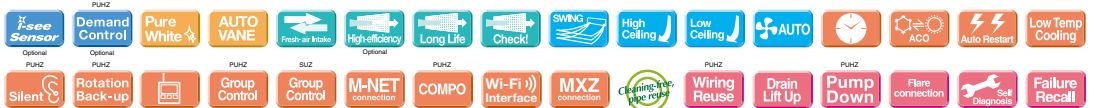

Type		Inverter Heat Pump												
Indoor Unit		PLA-RP35BA	PLA-RP50BA	PLA-RP60BA	PLA-RP71BA	PLA-RP100BA		PLA-RP125BA		PLA-RP140BA2				
Outdoor Unit		SUZ-KA35VA4	SUZ-KA50VA4	SUZ-KA60VA4	SUZ-KA71VA4	PUHZ-P100VHA4	PUHZ-P100YHA2	PUHZ-P125VHA3	PUHZ-P125YHA	PUHZ-P140VHA3	PUHZ-P140YHA			
Refrigerant		R410A ^{*1}												
Power Supply		Outdoor power supply VA4 · VHA3 · VHA4:230 / Single / 50, YHA · YHA2:400 / Three / 50												
Cooling	Capacity	Rated	kW		3.6	5.5	6.1	7.1	9.4	9.4	12.3	12.3	13.6	13.6
		Min - Max	kW		1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	4.9 - 11.2	4.9 - 11.2	5.5 - 14.0	5.5 - 14.0	5.5 - 15.0	5.5 - 15.0
	Total Input	Rated	kW		1.090	1.660	1.840	2.100	3.120	3.120	4.090	4.090	5.210	5.210
	EER				-	-	-	-	-	-	3.01	3.01	2.61	2.61
		EEL Rank			-	-	-	-	-	-	B	B	D	D
	Design Load		kW		3.6	5.5	6.1	7.1	9.4	9.4	12.3	12.3	13.6	13.6
	Annual Electricity Consumption ^{*2}		kWh/a		210	321	356	429	628	628	828	828	1028	1028
	SEER				6.0	6.0	6.0	5.8	5.2	5.2	5.2	5.2	5.2	5.2
		Energy Efficiency Class			A+	A+	A+	A+	A	A	A	A	A	A
		Capacity	Rated	kW		4.1	6.0	6.9	8.0	11.2	11.2	14.0	14.0	16.0
Heating (Average Season)	Total Input	Rated	kW		1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	4.5 - 12.5	4.5 - 12.5	5.0 - 16.0	5.0 - 16.0	5.0 - 18.0	5.0 - 18.0
	COP				-	-	-	-	-	-	3.41	3.41	3.21	3.21
		EEL Rank			-	-	-	-	-	-	B	B	C	C
	Design Load		kW		2.6	4.3	4.6	5.8	8.0	8.0	9.3	9.3	10.6	10.6
	Declared Capacity	at reference design temperature	kW		2.3 (-10°C)	3.8 (-10°C)	4.0 (-10°C)	4.7 (-10°C)	6.3 (-10°C)	6.3 (-10°C)	7.1 (-7°C)	7.1 (-7°C)	8.0 (-7°C)	8.0 (-7°C)
		at bivalent temperature	kW		2.3 (-7°C)	3.8 (-7°C)	4.0 (-7°C)	5.1 (-7°C)	7.1 (-7°C)	7.1 (-7°C)	8.0 (-7°C)	8.0 (-7°C)	9.3 (-7°C)	9.3 (-7°C)
		at operation limit temperature	kW		2.3 (-10°C)	3.8 (-10°C)	4.0 (-10°C)	4.7 (-10°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)	5.0 (-15°C)
	Back Up Heating Capacity		kW		0.3	0.5	0.6	1.1	1.7	1.7	1.7	1.7	1.7	1.7
	Annual Electricity Consumption ^{*2}		kWh/a		867	1503	1570	1913	2945	2945	3810	3810	4675	4675
	SCOP				4.2	4.0	4.1	4.3	3.8	3.8	3.8	3.8	3.8	3.8
	Energy Efficiency Class			A+	A+	A+	A+	A	A	A	A	A	A	
Operating Current (max)			A		8.4	12.4	14.4	16.6	28.9	13.9	29.0	14.0	30.5	14.0
Indoor Unit	Input	Rated	kW		0.03	0.05	0.05	0.07	0.14	0.14	0.15	0.15	0.15	0.15
	Operating Current (max)		A		0.22	0.36	0.36	0.51	0.94	0.94	1.00	1.00	1.00	1.00
	Dimensions <Panel>	H x W x D	mm		258 - 840 - 840	<35 - 950 - 950>			25 <6>	25 <6>	298 - 840 - 840	<35 - 950 - 950>	27 <6>	27 <6>
	Weight <Panel>		kg		22 <6>	22 <6>	23 <6>	23 <6>	25 <6>	25 <6>	26 <6>	27 <6>	27 <6>	27 <6>
	Air Volume [Lo-Mi2-Mi1-Hi]		m ³ /min		11 - 12 - 13 - 15	12 - 14 - 16 - 18	12 - 14 - 16 - 18	14 - 16 - 18 - 21	20 - 23 - 26 - 30	20 - 23 - 26 - 30	22 - 25 - 28 - 31	22 - 25 - 28 - 31	24 - 26 - 29 - 32	24 - 26 - 29 - 32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)		27 - 28 - 29 - 31	28 - 29 - 31 - 32	28 - 29 - 31 - 32	28 - 30 - 32 - 34	32 - 34 - 37 - 40	32 - 34 - 37 - 40	34 - 36 - 39 - 41	34 - 36 - 39 - 41	36 - 39 - 42 - 44	36 - 39 - 42 - 44
	Sound Level (PWL)		dB(A)		54	55	55	56	62	62	63	63	70	70
	Dimensions	H x W x D	mm		550 - 800 - 285	880 - 840 - 330			943 - 950 - 330 (+30)		1350 - 950 - 330 (+30)		99	101
	Weight		kg		35	44	50	53	75	77	99	100	99	101
	Air Volume	Cooling	m ³ /min		36.3	54	60	60	100.0	100.0	100.0	100.0	100.0	100.0
	Heating	m ³ /min		34.8	44.6	49.2	48.2	60.0	60.0	100.0	100.0	100.0	100.0	
Sound Level (SPL														

