

禪  
KIRIGAMINE ZEN

# MSZ-E SERIES

Developed to complement modern interior room décor, Kirigamine ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.

R32  
Single / Multi  
R410A  
Multi

MSZ-EF18-50VGB



GOOD DESIGN  
reddot award 2015 winner



## Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.



## Energy-efficient Operation

DC Inverter  
SEER A+++  
SCOP A++  
\*except for VEH


All models in the series have achieved high energy-savings rating, and are contributing to reduced energy consumption in homes, offices and a range of other settings. Offered in a variety of output capacities and installation patterns, the vast applicability promises an ideal match for any user.

Indoor	Outdoor	Rank A for single connection MUZ-EF25/35VG(H) MUZ-EF42/50VG	Compatibility					
			MXZ					
			2F33VF	2F42VF	2F53VF	3F54VF	3F68VF	4F72VF
MSZ-EF18VG		-	✓	✓	✓	✓	✓	✓
MSZ-EF22VG		-	✓	✓	✓	✓	✓	✓
MSZ-EF25VG		A+++ / A++ (A+++)	✓	✓	✓	✓	✓	✓
MSZ-EF35VG		A+++ / A++ (A++)		✓	✓	✓	✓	✓
MSZ-EF42VG		A++ / A+			✓	✓	✓	✓
MSZ-EF50VG		A++ / A+			✓	✓	✓	✓

\*VEH


## Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Silent Mode" fan speed setting provides super-quiet operation as low as 19dB for EF18/22/25 models for cooling. This unique feature makes the Kirigamine ZEN series ideal for use in any situation.

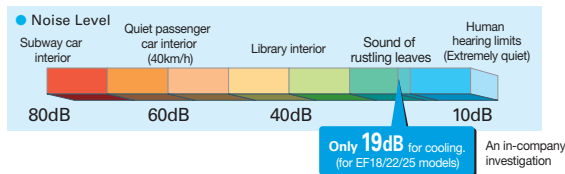


## Superior Exterior and Operating Design Concept

The indoor unit of the Kirigamine ZEN keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.

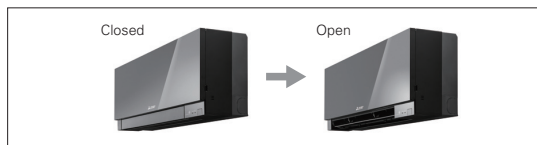

## Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

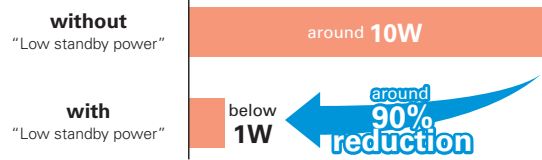

## Outdoor Units for Cold Region (25/35)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.



# MSZ-E SERIES



## Indoor Unit / Remote Controller

R32 R410A



MSZ-EF18/22/25/35/42/50VGW

White



MSZ-EF18/22/25/35/42/50VGS

Silver



MSZ-EF18/22/25/35/42/50VGB\*

Black



GOOD DESIGN



reddot award 2015 winner

## Outdoor Unit

R32



MUZ-EF25/35VG(H),42VG



MUZ-EF50VG

\* Soft-dry Cloth is enclosed with Black models.



Type	Inverter Heat Pump										
Indoor Unit	MSZ-EF18VG	MSZ-EF22VG	MSZ-EF25VG	MSZ-EF25VGH	MSZ-EF35VG	MSZ-EF35VGH	MSZ-EF42VG	MSZ-EF50VG			
Outdoor Unit	for MXZ connection		MUZ-EF25VG	MUZ-EF25VGH	MUZ-EF35VG	MUZ-EF35VGH	MUZ-EF42VG	MUZ-EF50VG			
Refrigerant	R32 <sup>(1)</sup>										
Power Supply	Outdoor Power supply 230/Single/50										
Cooling	Design load	kW	-	-	2.5	2.5	3.5	3.5	4.2	5.0	
	Annual electricity consumption <sup>(2)</sup>	kWh/a	-	-	96	96	139	139	186	233	
	SEER <sup>(3)</sup>		-	-	9.1	9.1	8.8	8.8	7.9	7.5	
	Energy efficiency class			-	-	A+++	A+++	A+++	A+++	A++	A++
		Capacity									
Heating (Average Season) <sup>(4)</sup>	Design load	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	
	Declared Capacity	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	
	Back up heating capacity	kW	-	-	2.0 (-15°C)	1.6 (-20°C)	2.4 (-15°C)	1.7 (-20°C)	3.4 (-15°C)	3.5 (-15°C)	
	Annual electricity consumption <sup>(2)</sup>	kWh/a	-	-	713	727	882	900	1151	1304	
	SEER <sup>(3)</sup>		-	-	4.7	4.6	4.6	4.5	4.6	4.5	
Operating Current (Max)	Input	kW	0.026	0.026	0.026	0.026	0.030	0.030	0.033	0.043	
	Operating Current (Max)	A	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4	
	Dimensions	H*W*D	mm	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	
	Weight	kg	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	
	Air Volume	Cooling	m <sup>3</sup> /min	4.0-4.6-6.3-8.3-10.5	4.0-4.6-6.3-8.3-10.5	4.0-4.6-6.3-8.3-10.5	4.0-4.6-6.3-8.3-10.5	4.0-4.6-6.3-8.3-10.5	5.8-6.6-7.7-8.9-11.2	5.8-6.6-7.9-9.2-11.3	
Indoor Unit	Sound Level (SPL)	Cooling	dB(A)	19-23-29-36-42	19-23-29-36-42	19-23-29-36-42	19-23-29-36-42	21-24-30-36-42	28-31-35-39-43	30-33-36-40-43	
	Sound Level (PWL)	Cooling	dB(A)	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-30-38-46	28-30-35-41-48	30-33-37-43-49	
	Dimensions	H*W*D	mm	-	-	550-800-285	550-800-285	550-800-285	550-800-285	714-800-285	
	Weight	kg	-	-	31	31	34	34	35	40	
	Air Volume	Heating	m <sup>3</sup> /min	-	-	27.8	27.8	34.3	32.0	40.2	
Outdoor Unit	Sound Level (SPL)	Cooling	dB(A)	-	-	47	47	49	50	52	
	Sound Level (PWL)	Cooling	dB(A)	-	-	48	48	50	51	52	
	Operating Current (Max)	A	-	-	6.8	6.8	6.8	6.8	9.6	13.6	
	Breaker Size	A	-	-	10	10	10	10	12	16	
	Ext. Piping	Diaper	Liquid/Gas	mm	-	-	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Guaranteed Operating Range (Outdoor)	Max.Length	Out-In	m	-	-	20	20	20	20	30	
	Max.Height	Out-In	m	-	-	12	12	12	12	15	
	Temperature	Cooling	°C	-	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.  
The GWP of R32 is 0.75 in the IPCC-4th Assessment Report.  
(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.  
(3) SH: Super High  
(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".  
(5) Please see page 00 for heating (warmer season) specifications.