

MXZ-HA SERIES

Multi-port outdoor units exclusively for MSZ-HR indoor units.



R32

2-port

MXZ-2HA40VF
MXZ-2HA50VF



R32

3-port

MXZ-3HA50VF

Stylish Design with Flat Panel Front


A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms

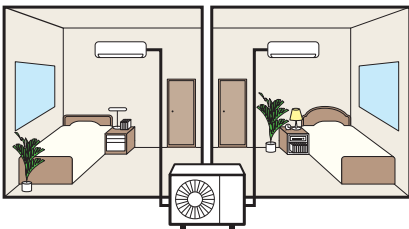


Three bedrooms

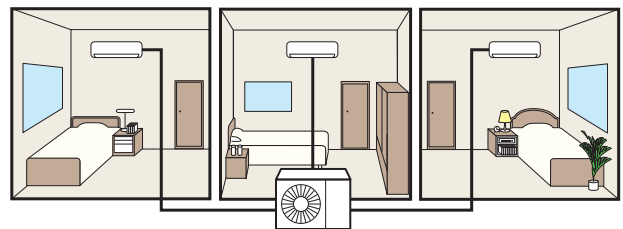

Living room and one bedroom

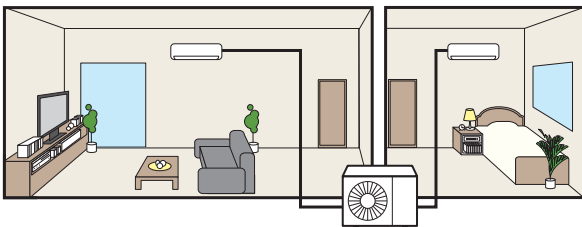

Wide living room

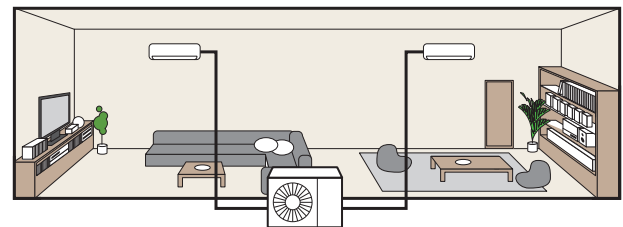

MXZ-HA SERIES

INVERTER MULTI



| Type (Inverter Multi - Split Heat Pump) | | | | Up to 2 Indoor Units | | Up to 3 Indoor Units | | |
|---|--------------------------------------|---------------------------------|-------|-------------------------------|-------------|-----------------------------|------|--|
| Indoor Unit | | | | Please refer to (*4) | | | | |
| Outdoor Unit | | | | MXZ-2HA40VF | MXZ-2HA50VF | MXZ-3HA50VF | | |
| Refrigerant | | | | R32*1 | | | | |
| Power Source | | | | Outdoor power supply | | | | |
| Supply Outdoor (V/Phase/Hz) | | | | 220-230-240 / Single / 50 | | | | |
| Cooling | Capacity | Rated | kW | 4.0 | 5.0 | 5.0 | | |
| | Input*4 | Rated | kW | 1.05 | 1.52 | 1.26 | | |
| | EER*4 | | | 3.81 | 3.29 | 3.97 | | |
| | | EEL Rank*4 | | A | A | A | | |
| | Design Load | | kW | 4.0 | 5.0 | 5.0 | | |
| | Annual Electricity Consumption*2 | | kWh/a | 172 | 225 | 241 | | |
| | SEER*4 | | | 8.12 | 7.78 | 7.26 | | |
| | | Energy Efficiency Class*4 | | A++ | A++ | A++ | | |
| | Heating (Average Season) | Capacity | Rated | kW | 4.3 | 6.0 | 6.0 | |
| | | Input | Rated | kW | 0.91 | 1.54 | 1.30 | |
| COP*4 | | | | 4.73 | 3.90 | 4.62 | | |
| | | EEL Rank*4 | | A | A | A | | |
| Design Load | | | kW | 3.2 | 3.2 | 4.0 | | |
| Declared Capacity | | at reference design temperature | | kW | 2.4 | 2.4 | 3.0 | |
| | | at bivalent temperature | | kW | 2.9 | 2.9 | 3.6 | |
| | | at operation limit temperature | | kW | 2.1 | 2.1 | 2.6 | |
| Back Up Heating Capacity | | | kW | 0.8 | 0.8 | 1.0 | | |
| Annual Electricity Consumption*2 | | | kWh/a | 1043 | 1043 | 1394 | | |
| SCOP*4 | | | 4.30 | 4.30 | 4.02 | | | |
| | Energy Efficiency Class*4 | | A+ | A+ | A+ | | | |
| Operating Current (max) | | | | A | 12.2 | 18.0 | | |
| Outdoor Unit | Dimensions | H x W x D | mm | 550 - 800 (+69) - 285 (+59.5) | | 710 - 840 (+30) - 330 (+66) | | |
| | Weight | | kg | 37 | | 57 | | |
| | Air Volume | Cooling | | m ³ /min | 28.4 | | 31.0 | |
| | | Heating | | m ³ /min | 33.5 | | 29.1 | |
| | Sound Level (SPL) | Cooling | | dB(A) | 44 | | 46 | |
| | | Heating | | dB(A) | 50 | | 50 | |
| | Sound Level (PWL) | Cooling | | dB(A) | 59 | | 61 | |
| | | Heating | | dB(A) | 4.9 | | 5.6 | |
| | Operating Current | Cooling | | A | 4.6 | | 5.8 | |
| | | Heating | | A | 15 | | 25 | |
| Breaker Size | | A | 15 | | 25 | | | |
| Ext. Piping | Port Diameter | Liquid / Gas | mm | 6.35 x 2 / 9.52 x 2 | | 6.35 x 3 / 9.52 x 3 | | |
| | Total Piping Length (max) | | m | 30 | | 50 | | |
| | Each Indoor Unit Piping Length (max) | | m | 20 | | 25 | | |
| | Max. Height | | m | 15 (10)*3 | | 15 (10)*3 | | |
| | Chargeless Length | | m | 30 | | 40 | | |
| Guaranteed Operating Range (Outdoor) | Cooling | | °C | -10 ~ +46 | | | | |
| | Heating | | °C | -15 ~ +24 | | | | |

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2HA40VF MSZ-HR25VF + MSZ-HR25VF
 MXZ-2HA50VF MSZ-HR25VF + MSZ-HR25VF
 MXZ-3HA50VF MSZ-HR25VF + MSZ-HR25VF + MSZ-HR25VF