


Main HBC Controller

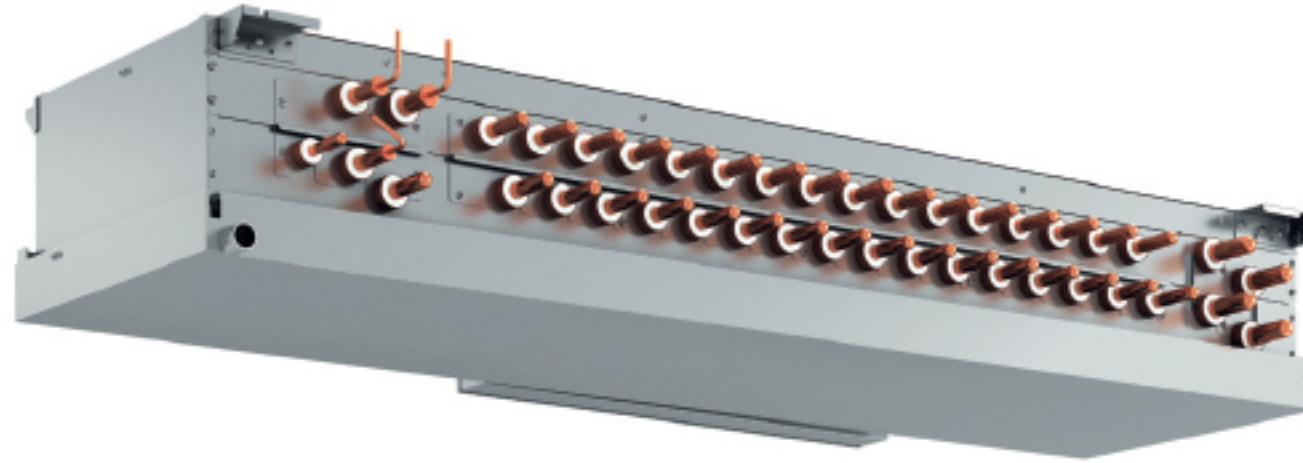

Technical specifications

MODEL			CMB-WP108V-GA1	CMB-WP1016V-GA1
Number of branches			8 (22mm OD pipe)	16 (22mm OD pipe)
Net weight		kg	86	98
Weight with water		kg	96	111
Dimensions	Width	mm	1520	1800
	Depth	mm	630	630
	Height	mm	300	300
Power supply			220-240V, 50Hz	220-240V, 50Hz
Phase			1	1
Power input		kW	0.46	0.46
Current		A	2.83	2.83

Units CMB-WP-V-GA1 and CMB-WP-V-GA1 are to be used exclusively with outdoor units PURY-P200-500YLM-A1, PURY-EP200-500YLM-A1, PQRY-P200-500YLM-A and indoor units HVRF (PEFY-WP, PFFY-WP, PLFY-WP).
 One HBC Main can be used with PURY-(E)P200-350YLM-A1, PQRY-P200-350YLM-A
 Two HBC Main can be used with PURY-(E)P300-500YLM-A1, PQRY-P300-500YLM-A