


Sub HBC Controller

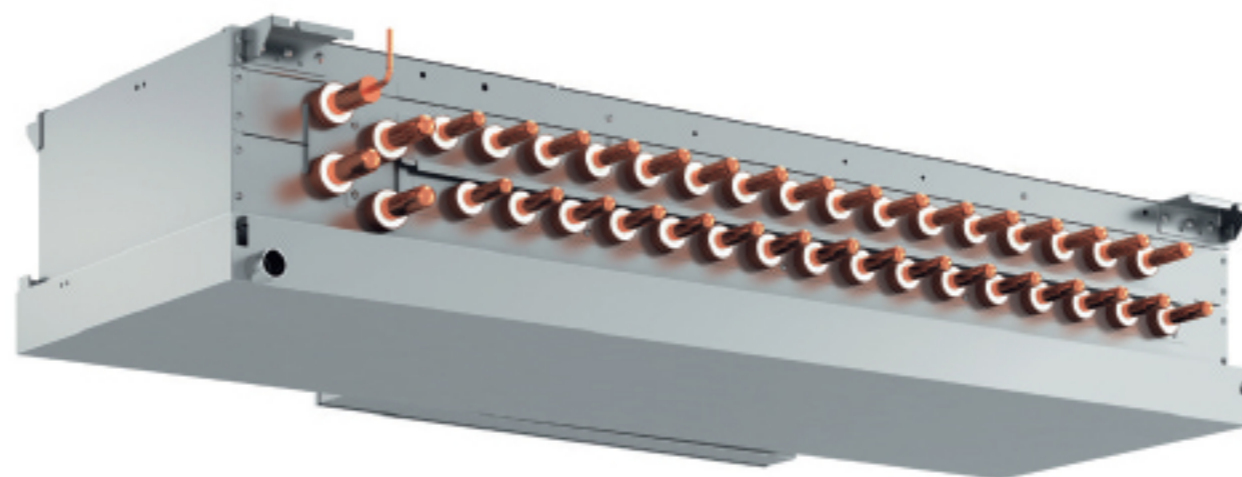

Technical specifications

MODEL			CMB-WP108V-GB1	CMB-WP1016V-GB1
Number of branches			8 (22mm OD pipe)	16 (22mm OD pipe)
Net weight		kg	44	53
Weight with water		kg	49	62
Dimensions	Width	mm	1520	1520
	Depth	mm	630	630
	Height	mm	300	300
Power supply			220-240V 50Hz	220-240V, 50Hz
Phase			1	1
Power input		kW	0.01	0.01
Current		A	0.05	0.05

Units CMB-WP-V-GA1 and CMB-WP-V-GB1 are to be used exclusively with outdoor units PURY-P200-500YLM-A1, PURY-EP200-500YLM-A1, PQRY-P200-500YLM-A and indoor units HVRF (PEFY-WP, PFFY-WP, PLFY-WP).