

MSY-TP SERIES


Cooling only model with high-performance provide high SHF in various environments thanks to wide operation range.

R32

MSY-TP35/50VF




High Energy-Saving Performance with High SHF

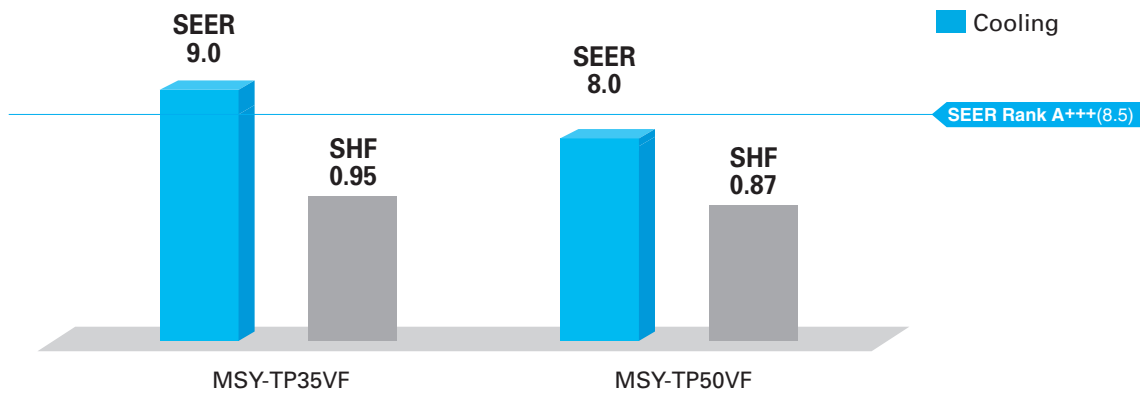

Wide Cooling Operating Range

As a result of an extended operating range in cooling, these models accommodate a wide range of usage environments and applications.

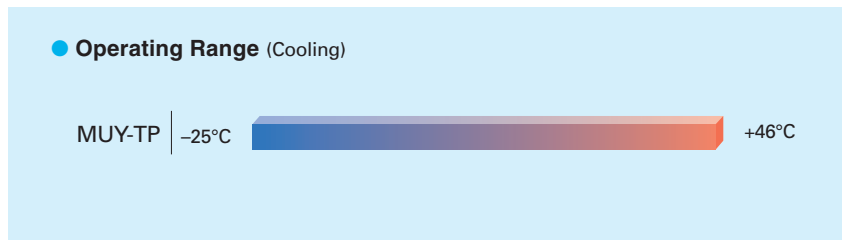

MSY-TP SERIES




Indoor Unit R32



MSY-TP35/50VF


Outdoor Unit R32



MUY-TP35/TP50VF

Remote Controller

- Wired remote controller can be connected to indoor unit.



Type		Inverter Heat Pump			
Indoor Unit		MSY-TP35VF		MSY-TP50VF	
Outdoor Unit		MUY-TP35VF		MUY-TP50VF	
Refrigerant		R32 ⁽¹⁾			
Power Source		Indoor Power supply			
Supply		Outdoor (V / Phase / Hz)			
Cooling	Design load	kW	3.5	5.0	
	Annual electricity consumption ⁽²⁾	kWh/a	136	218	
	SEER ⁽⁴⁾		9.0	8.0	
	Capacity	Energy efficiency class		A+++	A++
		Rated	kW	3.5	5.0
	Total Input	Min-Max	kW	1.5 - 4.0	1.5 - 5.7
Rated		kW	0.760	1.450	
Heating (Average Season) ⁽³⁾	Design load	kW	-	-	
	Declared Capacity	at reference design temperature	kW	-	-
		at bivalent temperature	kW	-	-
		at operation limit temperature	kW	-	-
	Back up heating capacity	kW	-	-	
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	
	SCOP ⁽⁴⁾		-	-	
	Capacity	Energy efficiency class		-	-
Rated		kW	-	-	
Total Input	Min-Max	kW	-	-	
	Rated	kW	-	-	
Operating Current (Max)		A	9.6	9.6	
Indoor Unit	Input	Rated	kW	0.033	0.034
		Operating Current (Max)	A	0.4	0.4
	Dimensions	H*W*D	mm	305-923-250	305-923-250
	Weight	kg	12.5	12.5	
	Air Volume (Lo-Mid-Hi-SH) ⁽³⁾ (Dry/Wet)	Cooling	m ³ /min	10.1 - 11.6 - 13.7 - 16.4	10.1 - 11.6 - 13.7 - 16.4
		Heating	m ³ /min	-	-
	Sound Level (SPL) (Lo-Mid-Hi-SH) ⁽³⁾	Cooling	dB(A)	31 - 36 - 40 - 45	31 - 36 - 40 - 45
		Heating	dB(A)	-	-
	Sound Level (PWL)	Cooling	dB(A)	60	60
		Heating	dB(A)	10	10
Breaker Size	A		10	10	
Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	550-800-285
	Weight	kg	34	34	
		Air Volume	Cooling	m ³ /min	29.3
	Sound Level (SPL)	Heating	m ³ /min	-	-
		Cooling	dB(A)	45	47
	Sound Level (PWL)	Heating	dB(A)	-	-
		Cooling	dB(A)	58	61
Operating Current (Max)	A		9.2	9.2	
Ext. Piping	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52
	Max.Length	Out-In	m	20	20
	Max.Height	Out-In	m	12	12
Guaranteed Operating Range (Outdoor)	Cooling	°C	-25 ~ +46	-25 ~ +46	
	Heating	°C	-	-	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC-4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011.